





XSB Load cell

XSB

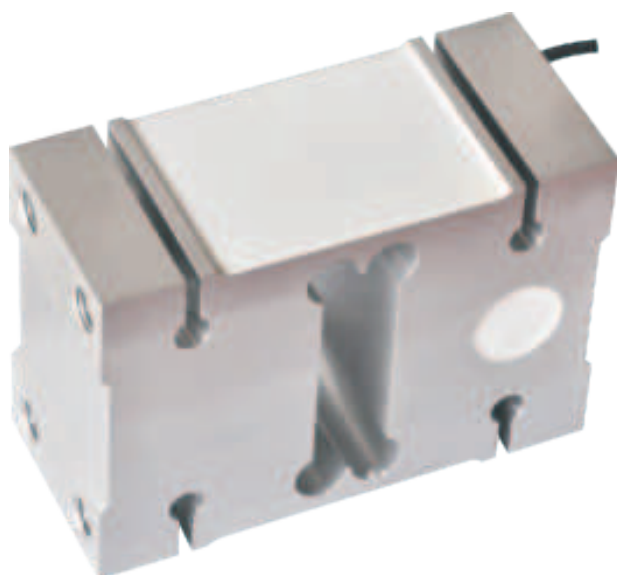

Rated Load (kg)	A	B	C	D	E	F
50 ~ 200	156	44	75	50	24	M12
300 ~ 500	146	60	95	70	36	M12
750 ~ 2000	176	76	125	95	46	M16

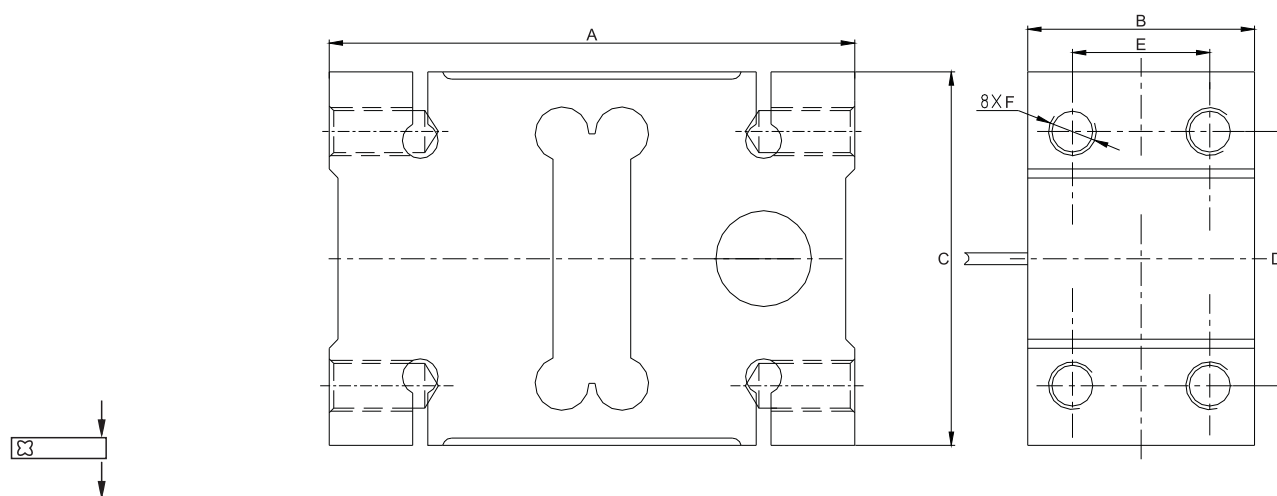

Platform scale, all kinds of compression testing devices

TECHNICAL PARAMETER

OAP version 4Wires:Exc+(Blue);Exc-(Black);Sig+(White);Sig-(Red)

Rated capacities(Emax)	50,100,200,300,500,750kg;1t,2t;	Temperature range, compensated	-10℃~+40℃
Sensitivity	2.0±0.2mV/V	Temperature range, operating	-20℃~+50℃
Accuracy class		Maximum safe overload	150%Emax
Creep error (30min)	±166ppm	Ultimate overload	300%Emax
Zero balance	±3%Emax	Excitation,recommended	10V DC
TC ZERO	±17.5ppm/℃	Excitation,maximum	15V DC
TC SPAN	+20℃~+40℃, ±17.5ppm/℃	Protection class	IP65
	-10℃~+20℃, ±11.67ppm/℃	Construction	铝合金Aluminium
Input resistance	404±15Ω	Cable	3m@Φ5mm
Output resistance	350±3Ω		
Insulation resistance	≥2000MΩ (50V DC)	Installation torque,recommended	35N·m
Max platform size	50 ~ 200kg 600×600mm 300 ~ 500kg 600×800mm 750 ~ 2000kg 1200×1200mm		

Keli CEE

ul. Żółkiewskiego 3A, 4 piętro
63-400 Ostrow Wielkopolski

tel./fax. +48 62 592 42 78
e-mail: info@keli-cee.com

www.keli-cee.com